

The AIRFIX DRAW ALIGNER is an indispensable asset for auto-body specialists performing dent removal work. The patented design features a non-glued, recessed seal that can be changed in a matter of moments. In addition, 4 pads in the vacuum prevent the gasket from slipping, which makes it even more robust. It is easily one of the most reliable dent pulling systems on the market.

## INNOVATIVE AND PATENTED DESIGN

- The suction cup plate is equipped with 4 rubber pads, which absorb the shearing forces when pulling.
- The surrounding seal is recessed without glue.
- The seal and the pads are easily replaceable.


## POWERFUL AND EFFECTIVE PULLING

- Pulling capacity up to 350 kg across the whole height of the unit.
- Max. pulling height of 1.30 m.
- Crank winch with Ø6 mm wire rope (1.5 ton tensile strength).
- Slide system to adjust the pulling height in seconds and without the need for any tools.
- Angled gear to facilitate downward pulling.

## ERGONOMIC DESIGN

- Lightweight (31Kg) and easy to move with two wheels.
- Low noise level achieved by a high performance silencer.

## OPERATION

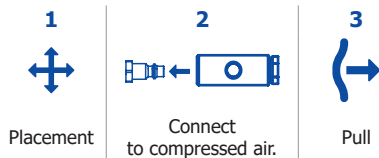

## SPARE PARTS

Wire rope	079588	2.5m
Seal for plate	079571	1720mm

Change the height of the winch instantly without removing any parts

1.25 m

MADE IN FRANCE

Pulling force of 350 kg up to 1.3m

Supplied with 6-tooth claw



60 cm

37 cm

Seal

4 pads prevent the seal from sliding off

9 cm

118 cm

40 cm



kg

31 kg



max.

5 > 8 bar



R 1/4

R 1/4