


# **TEMPORARY PUNCTURE REPAIR KIT**

MODEL NO: TST10

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

**IMPORTANT:** PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.

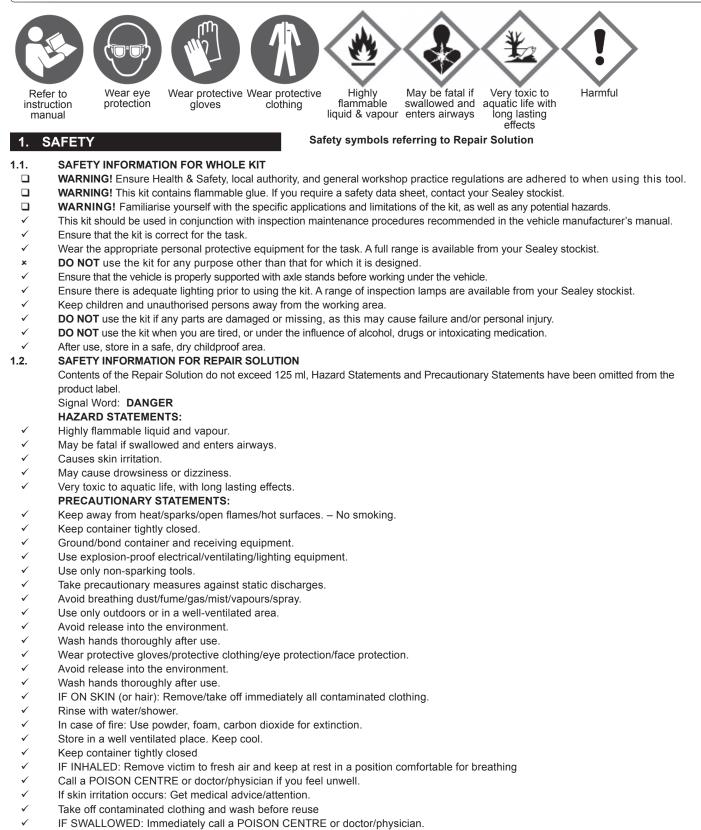

- **× DO NOT** induce vomiting.
- ✓ Collect spillage.

✓ Store locked up. Dispose of contents/container in accordance with local regulation

## 2. INTRODUCTION

Ideal for repairing punctures on tubeless tyres fitted to agricultural and off road vehicles. Can also be used as a temporary/emergency fix on cars and commercial vehicles. Allows tyre to be repaired without removing the tyre from the wheel.


Not to be used as a permanent repair for road vehicles.



# 3. SPECIFICATION

### 4. OPERATION

- **4.1.** Remove object (causing puncture) from tyre if required.
- 4.2. Fit collar onto insertion needle by using hex key to undo grub screw, (see fig.1).
- **4.3.** Clean/widen puncture hole with rasp.
- 4.4. Fit strip in the middle of the insertion needle, with 50% protruding from each end.
- **4.5.** Cover the strip with glue.
- 4.6. Push the strip most of the way through the tyre with the insertion needle, leave 20mm of the strip sticking out.
- **4.7.** As you pull the insertion needle back out, use your other hand to push down the collar, so that the tool nips on the strip and the strip is pulled back out of the tyre.
- 4.8. There will now be a loop and 2 ends protruding from tyre, that need to be cut off.
- **4.9.** Clean items in the kit and remove protector from insertion needle. Store kit in a safe, childproof location.

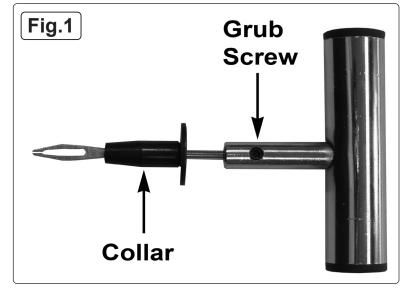



#### ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR 01284 757500 01284 703534 🖗 sales@sealey.co.uk 💮 www.sealey.co.uk